


TECHNICAL SPECIFICATION

MODEL	OPENINGS	VOLUME (Ltrs.)	DIMENSIONS (mm)											BASE	WEIGHT OF VESSEL WITH BASE (Kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
14X47	2½" TOP	101.7	360	369	1195	1181	930	198	100	6.5	3	6.5	2	Standard	11.3
14X52	2½" TOP	114.2	360	369	1325	1311	1060	198	100	6.5	3	6.5	2	Standard	11.9
14X65	2½" TOP	145.7	360	369	1655	1641	1390	198	100	6.5	3	6.5	2	Standard	13.7

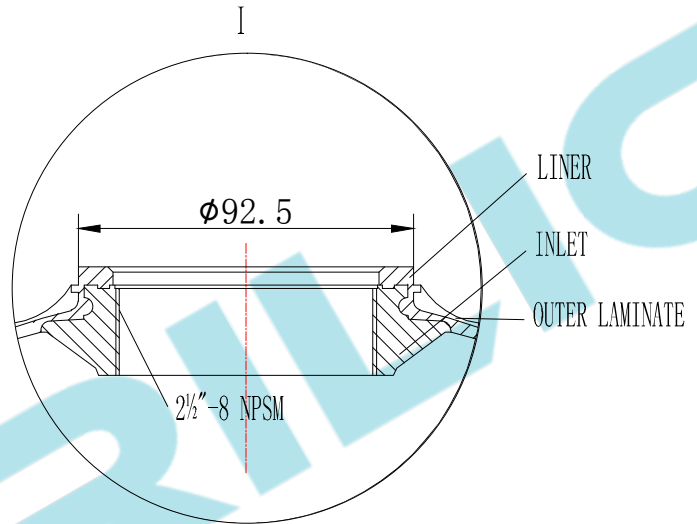

2½" -8 NPSM Internal Thread

PITCH DIA	2.762-2.768"
MINOR DIA	2.705-2.715"
MAJOR DIA	2.843-2.849"

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE: 10.5BAR(150PSI)
 - TEMPERATURE RANGE: 1-50°C (34-122°F)
 - MAXIMUM VACUUM: 17kPa (5" Hg)

	NAME	DATE	VERSION NO.	CHANGING DESCRIPTION	CHANGING DATE
DESIGN					
INSPECTION			INDUSTRIAL VESSEL		
			MODEL: 14" (2½" TOP)	DRAWING NO.	NY-WI-DR-TE-PR-SA-VE0014250
APPROVAL			MATERIAL FRP UNIT mm	VERSION NO. 1.1	TOTAL PAGE 1 OF 1 DO NOT MEASURE THE DIMENSIONS.